

RAH-212

DUAL 12-INCH LINE ARRAY



Technical specification

Frequency Response	50Hz-18kHz (±3dB) 45Hz-20kHz (-10dB)
Nominal Directivity(-6dB)	90°(H) × 8°(V) Vertical adjustable
Average Sensitivity(1w@1m):	103dB (preset program)
Power Handling(AES/PEAK)	1310W/5240W
Nominal Impedance	HF/MF/LF : 16Ω/13Ω/13Ω
Maximum SPL(AES/PEAK)	134dB/140dB
LF driver	2×12" neodymium driver, 3" voice coil
MF driver	1×10" neodymium driver, 2.5" voice coil
HF driver	2×3" neodymium compression driver, 3" voice coil

Physical data

Cabinet Size(W×H×D)	1050×373×560mm
N.W	65 kg
Connector	2 × Speakon WP7
Installation	3-point rigging
Cabinet Material	18mm and 24mm birch plywood
Finish	Black polyurea paint
Angle	0° , 1° , 2° , 3° , 4° , 5° , 6° , 7° , 8° adjustable

REMARKS:


- ① The frequency response curve is a curve obtained after a preset program and tested in an anechoic room (full free space)
- ② Sensitivity is the SPL obtained at 1 meter on the central axis with 1 watt of power in an anechoic room (full free space) environment

Feature


- > LF symmetrical structure, MF&HF coaxial, tri-amp, three-way line array system
- > Durable integrated magnetic pins
- > All neodymium driver to reduce weight
- > Neodymium drivers provide high SPL and dynamic margin
- > Presettable angles & easy hanging
- > Preset multiple processor parameter modes to meet various venues
- > Safe and reliable speaker interface and humanized dolly board transportation mode
- > The surface of cabinet with scratch proof polyurea paint

1+...LF+ ;
1-...LF- ;
2+...MF+ ;
2-...MF- ;
3+...HF+ ;
3-...HF- ;
4+...Loop ;
4-...Loop ;

Structure and Dimensions

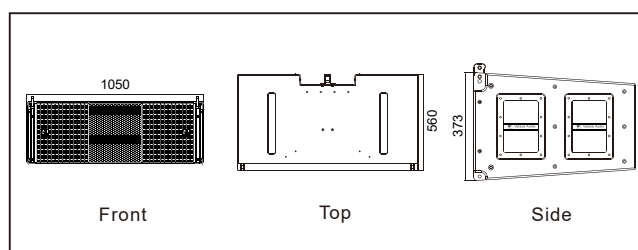

Parametric graph

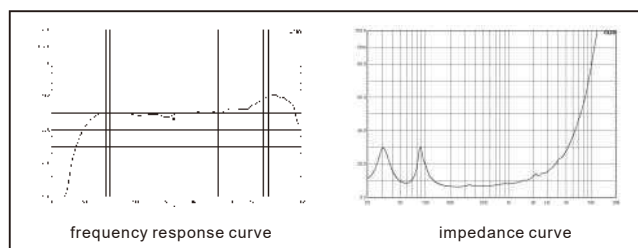

Transport and installation

