



RAS-115L

DUAL 15-INCH SUBWOOFER




Technical specification

Frequency Response	40Hz-200Hz (±3dB) 30Hz-320Hz (-10dB)
Nominal Directivity(-6dB)	omnidirectional
Average Sensitivity(1w/1m)	100dB
Power Handling(AES/PEAK)	1000W/4000W
Nominal Impedance	8Ω
Maximum SPL(AES/PEAK)	130dB/136 dB
LF Driver	2 × 15" customized ferrite driver, 3" v.c
Physical data	
Dimension(W×H×D)	650×610×806mm
N.W	85kg
Connector	2 × 4-pin Speakon WP4 or NL4
Cabinet Material	18mm birch plywood
Finish	Black stonetex paint
Grille	Steel mesh
Rigging	5°, 0°, -5°, -8° adjustable


NL4: Pin1+/1-...SUB
Pin2+/2-...Thru

Physical data

Structure and Dimensions

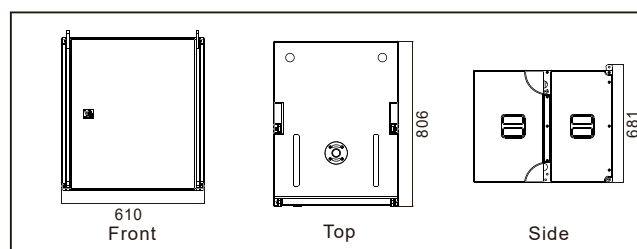

Parametric graph

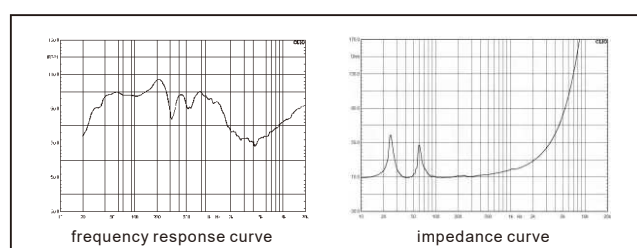

REMARKS:

- ① The frequency response curve is a curve obtained after a preset program and tested in an anechoic room (full free space)
- ② Sensitivity is the SPL obtained at 1 meter on the central axis with 1 watt of power in an anechoic room (full free space) environment

Feature

- > 75mm voice coil high-transient double magnet steel woofer
- > Small volume, phase & horn combination design
- > Can extend LAS low frequency response
- > Reliable and durable magnetic bolt
- > Space-saving dolly board